



T-TYPE SEDIMENT STRAINERS




JS Series

過濾器

JS 300
Size: 1/2" - 8"

● MATERIALS OF CONSTRUCTION

MATERIAL	U-PVC, PP, CPVC, PPG, PVDF
SIZES	1/2", 3/4", 1", 1-1/4", 1-1/2", 2", 2-1/2", 3", 4", 5", 6", 8"
PRESSURE	Testing Pressure: 1/2"~ 4" : 10kg/cm ² : 5"~ 8" : 6kg/cm ² . Working Pressure: 1/2"~ 4" : 7kg/cm ² : 5"~ 8" : 4kg/cm ² .
END CONNECTIONS	Flange ends with in JIS; DIN; ANSI; BS STANDARD
WORKING TEMP	U-PVC:0°C~60°C, PP:-20°C~90°C, PPG:-20°C~100°C, CPVC:0°C~90°C, PVDF:-40°C~120°C

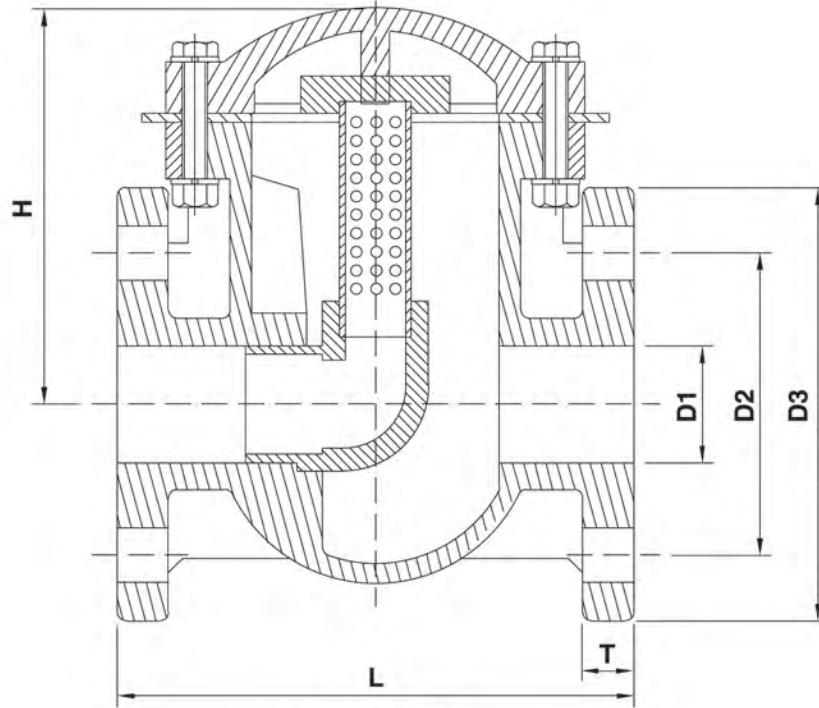

DN15~DN200

● DIMENSIONS TABLE

Nom. Size DN-inch	D1	L	D2			D3			T	SCREEN (mm)
			JIS	DIN	ANSI (inch)	JIS	DIN	ANSI (inch)		
15-1/2"	25	160	70	65	2.38	95	95	3.50	15	2.5
20-3/4"	25	160	75	75	2.76	100	105	3.86	15	2.5
25-1"	25	160	90	85	3.13	125	125	4.25	15	2.5
32-1-1/4"	41	180	100	100	3.50	135	135	4.60	16	2.5
40-1-1/2"	41	180	105	110	3.88	140	140	5.51	18	2.5
50-2"	52	200	120	125	4.74	155	155	6.10	18	2.5
65-2-1/2"	80	260	140	145	5.49	175	175	6.88	20	2.5
80-3"	80	260	150	160	6.00	185	185	7.28	20	2.5
100-4"	100	300	175	180	7.50	210	210	8.26	24	2.5
125-5"	125	350	210	210	8.50	250	250	9.84	24	2.5
150-6"	150	400	240	240	9.51	280	280	11.62	30	2.5
200-8"	200	500	290	295	11.75	330	330	12.99	30	2.5